


**NOTE:**

NO PROVISIONS HAVE BEEN MADE IN ANY SHARON STAIR SYSTEM TREAD FOR ANY LOOSE TYPE FIELD POURED NOSINGS FURNISHED AND INSTALLED BY OTHERS. IF SUCH PROVISIONS ARE REQUIRED ON A PROJECT IT WILL BE THE RESPONSIBILITY OF OTHERS TO SUPPLY SHARON WITH THE PROPER INFORMATION IN ADEQUATE TIME TO MAKE THESE PROVISIONS.

1 1/2" CONCRETE FILL IN FIELD BY OTHERS

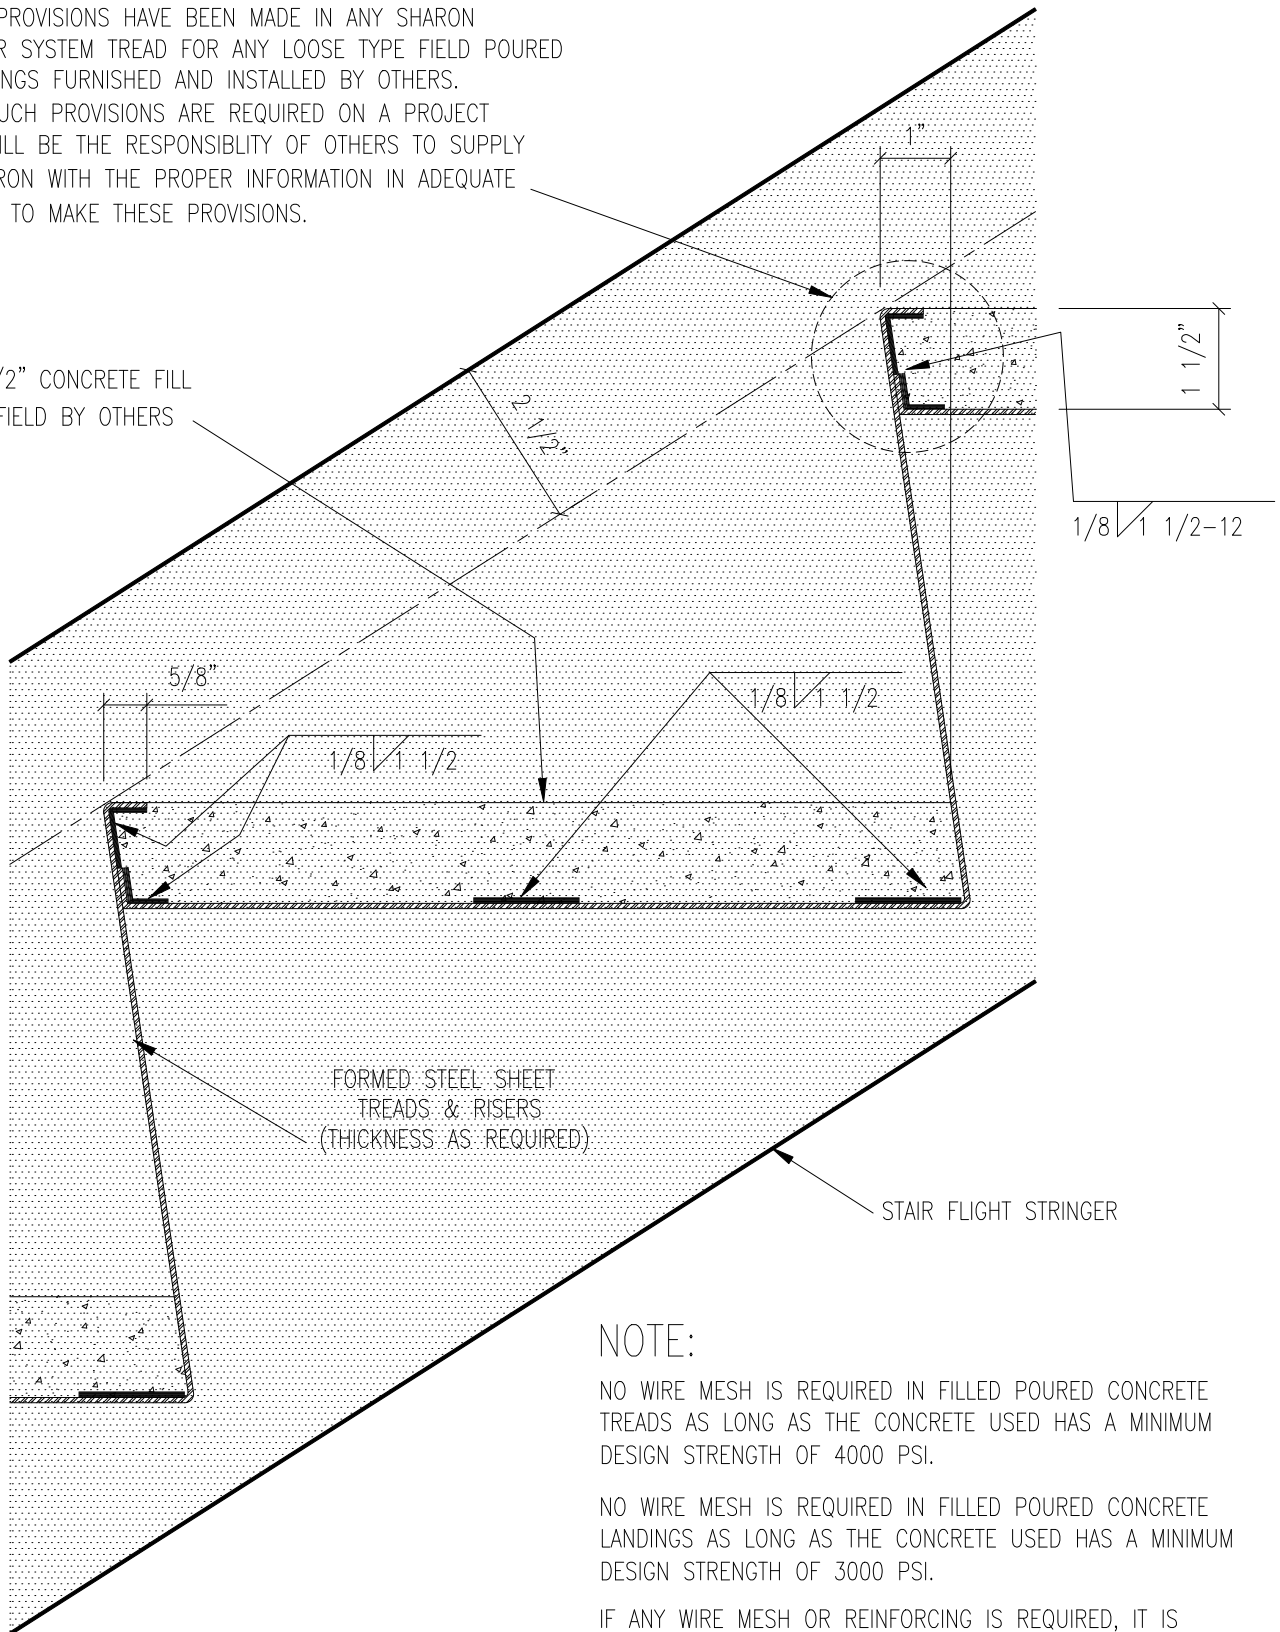

**NOTE:**

NO WIRE MESH IS REQUIRED IN FILLED POURED CONCRETE TREADS AS LONG AS THE CONCRETE USED HAS A MINIMUM DESIGN STRENGTH OF 4000 PSI.

NO WIRE MESH IS REQUIRED IN FILLED POURED CONCRETE LANDINGS AS LONG AS THE CONCRETE USED HAS A MINIMUM DESIGN STRENGTH OF 3000 PSI.

IF ANY WIRE MESH OR REINFORCING IS REQUIRED, IT IS TO BE FURNISHED AND INSTALLED BY OTHERS.

FOR FURTHER DETAIL PLEASE VISIT [WWW.SHARONSTAIR.COM](http://WWW.SHARONSTAIR.COM)



**CONCRETE FILLED (FIELD FINISHED)**

TYPICAL TREAD DETAIL

5TH EDITION

SCALE: NTS

7-2